


VIP-WIRELESS OPERATING GUIDE

Outdoor/indoor wireless PIR intruder detector with Anti-masking



Features	
Bi-directional.	
Anti-masking protection.	
Two PIR sensors.	
Waterproof and all-weather resistant.	
LED indicators	
Upon battery installation The red LED blinks for about 1 minute (until the detector is warmed up).	
During normal operation:	
1.Data transmission The yellow LED blinks shortly.	
2.Once getting the receiver acknowledgement The red LED blinks shortly.	
Specifications	
Battery	3.6V, 1/2AA Lithium Battery
Current	Standby = 10µA, Max.
Detection range	Indoors = 12 meter, Outdoors = 8 meter.

DIP Switch

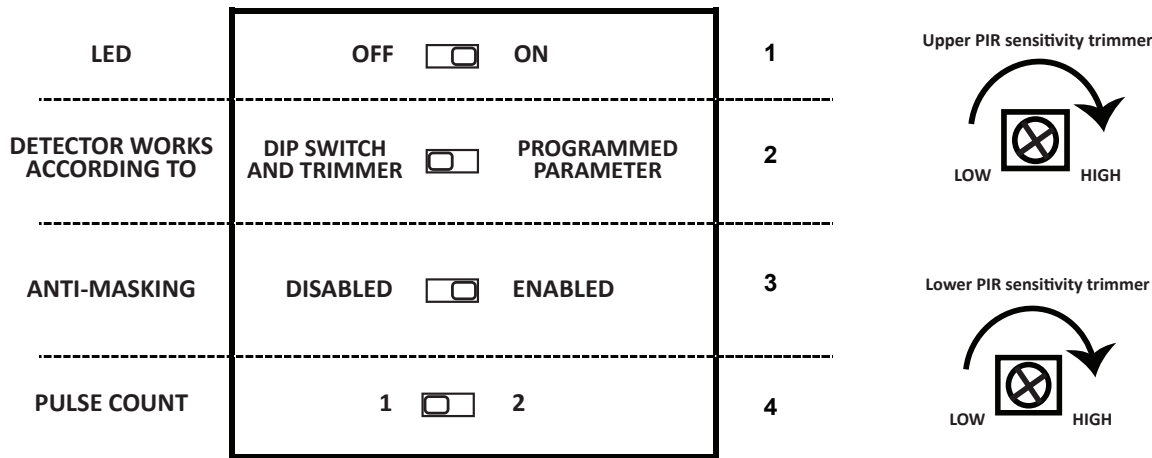

Preparing the Anti-masking channel for operation (Study Procedure) (Obligatory for proper anti-masking operation!!!)

To enable proper operation of the masking detection (anti-masking), it is necessary to allow the detector to automatically study and analyze the environmental conditions of its protected area. This is an obligatory action that should be performed by the installer, to ensure proper operation of the anti-masking channel!!!

The "Study Procedure" will start automatically after the detector's cover is closed and DIP switch No.3 is switched ON

How to Perform the Study Procedure

- The procedure shall not be executed when the detector is exposed to direct sunlight.
- Close the detector's case.
- Keep at least **1** meter away from the detector's front part, until the study procedure is completed, approximately **35** seconds.

At the beginning of the study procedure, the red and yellow LED indicators will blink together for **30** seconds. Then the yellow LED will glow constantly during the entire Study Procedure which will last for another 5 seconds.

Certificate of warranty

MAXIMUM Electronics (1984) Security Ltd. thanks you for buying its products, which have proven their reliability and effectiveness over many years. To ensure proper operation and functioning of the product and benefit from its features to the utmost, read the Installation & Operating instructions carefully and follow them step by step. MAXIMUM Electronics Security (1984) Ltd. (hereinafter – the "Manufacturer") hereby warranties/guarantees the products manufactured by it (hereinafter – "Product" or "Products") against defects in production or in materials discovered during their reasonable use and servicing, in accordance with the Manufacturer's instructions, recommendations and limitations and subject to the provisions of this Certificate of Warranty. This Warranty is for a limited period of 12 months from the last day of the week and the year whose number is printed on the electronic card (PCB) and/or electronically encoded in one of the Product's components. This Warranty is limited to the repair of a defective Product, or its replacement at the Manufacturer's option, during the Warranty period, subject to reasonable use and servicing in accordance with the Manufacturer's instructions, recommendations and limitations. To realize the Warranty rights, the Product must be sent to the Manufacturer securely packaged and accompanied by a document describing the problem, with insurance and freight prepaid by the sender. The Manufacturer's products boast a high standard of reliability, proven in tens of thousands of products over many years. The percentage of problems encountered in them is virtually nil, therefore a Product must be carefully checked (according to the operating instructions) before sending it to the Manufacturer for examination and/or servicing in the Warranty framework. In the event that the installer and/or user and/or customer and/or operator of a Product (hereinafter – the "Customer") returned the Product to the Manufacturer on the grounds that it is defective and received in exchange from the Manufacturer a functional product, and upon examination the Manufacturer found that the returned Product was not defective – the Customer will be charged the Product's full value as consideration for the resources invested by the Manufacturer in its examination. The Manufacturer shall in no case be liable for damage or loss (including monetary loss), whether direct, indirect, accidental, circumstantial or otherwise, entailed in the dismantling or reinstallation of the Product. In case the Manufacturer decides to replace a returned Product that was found to be defective, the Customer hereby gives its consent to receiving – at no added cost – also a higher version of the Product. This Warranty is not valid in the following cases: incorrect installation, installation and/or operation not in accordance with the Manufacturer's instructions, alteration, misuse, accident, sabotage, repair or servicing by someone other than the Manufacturer and/or Force majeure. The Customer must take all necessary precautions to prevent and eliminate any discharge of static electricity or other interference that could affect the Product's functioning. This Warranty is exclusive and explicit and replaces any other warranty, commitment, or guarantee – whether written, oral or implied. The Manufacturer will in no case be liable toward anyone for a breach of this Certificate of Warranty or of any of its foregoing provisions. This Certificate of Warranty may not be altered, exchanged, or expanded, and the Manufacturer does not authorize anyone to do so on its behalf – including any distributor, dealer, agent, representative, or employee of the Manufacturer operating by its authority or on assignment from it. This Warranty applies to the Product only! Any other product, accessory, or adjunct used together with the Product (including batteries) will be covered solely by its exclusive warranty if such exists. The Manufacturer shall in no case be liable for damage or loss, whether direct, indirect, accidental, circumstantial, or otherwise, caused by the proper and/or improper functioning of the Product due to the use of other products, accessories, or adjuncts (including batteries) together with the Product. The Manufacturer does not claim that the Product is immune to malicious neutralization, bypass, sabotage, or deception, or that it will prevent in every case death or physical and/or mental injury due to burglary, robbery, fire, or the like, or that the Product will provide in all cases adequate and/or suitable warning or protection. The Customer understands that correct installation and maintenance, in accordance with the Manufacturer's instructions, recommendations, and limitations, merely reduces the risk of failure to give warning in cases such as burglary, robbery, and fire, but in no way ensures or guarantees that such cases will not occur or will not result in death or physical and/or mental injury and/or damage to property. **The Manufacturer shall in no case be liable for death or physical and/or mental injury and/or damage to property and/or loss of any kind, whether direct, indirect, accidental, circumstantial or otherwise, on the grounds that the Product did not operate/function properly and/or as expected and/or according to the description in its specification or in any other documentation.** The Manufacturer shall in no case be liable for damage or loss (including death or physical and/or mental injury and/or damage to property), whether direct, indirect, accidental, circumstantial or otherwise, caused through use of and/or reliance upon the Product. In the event that the Manufacturer is held liable, directly, indirectly, circumstantially or otherwise, for any loss or damage according to the terms of this limited Warranty or otherwise (irrespective of its cause or origin), the maximum amount of the Manufacturer's warranty and/or guarantee shall not exceed in any case the Product's price, and it shall be payable as full and final consideration, and not as a penalty, and shall constitute the entire and sole compensation by the Manufacturer. It is hereby clarified that the Warranty under this Certificate of Warranty does not cover anything not explicitly and specifically referred to herein. It is hereby agreed that the Customer waives in advance any claim or contention against the Manufacturer. Should the Customer and/or a person on his/her behalf nevertheless file suit against the Manufacturer, the Customer and/or that person in such case shall bear all their costs and the Manufacturer's costs arising therefrom, including lawyer's fees, and shall indemnify the Manufacturer for the full amount adjudicated against it in a decision, if any, rendered by any court or arbitrator. **Warning!** The Customer must make sure that the Product meets all his/her requirements, and he/she must comply fully with the installation and operating instructions and inter alia check the Product and the entire system at least once a week including under field conditions. For various reasons (but not only those set out below), changes in environmental conditions and/or electric or electronic interference and/or malicious damage to the Product could cause the Product to function in an unforeseen manner. The Customer must take all precautions to ensure his/her own safety and security and that of his/her property. The Customer confirms that he/she read all the conditions of this Certificate of Warranty and he/she agrees thereto. Installation and/or operation of the Product shall be deemed as the Customer's agreement to all the conditions of this Certificate of Warranty.